




- ▾ Multi-jet dry type
- ▾ 360°C rotatable cover
- ▾ Display on 5 drums m<sup>3</sup> and 4 pointers for litres
- ▾ Optional check valve
- ▾ Magnetic field protection
- ▾ Measuring range up to R80
- ▾ Optional pulse, M-bus, Radio frequency output
- ▾ Hermetically sealed register (IP68)
- ▾ Brass housing
- ▾ Water temperature up to 90°C

### Technical Specification


	DN	mm	15	20	20	20
Nominal diameter	DN	mm	15	20	20	20
Nominal flow rate	Q <sub>s</sub>	m <sup>3</sup> /h	2,5	2,5	4	4
Maximum flow rate	Q <sub>4</sub>	m <sup>3</sup> /h	3,125	3,125	5	5
Minimum flow rate	Q <sub>s</sub>	l/h	31,2	31,2	50	50
Transitional flow rate	Q <sub>2</sub>	l/h	50	50	80	80
Maximum working pressure	P <sub>max</sub>	bar	16	16	16	16
Pressure loss (max.Q <sub>3</sub> )	ΔP	bar	0,4	0,4	0,4	0,4
Maximum working temperature	T <sub>max</sub>	°C	90	90	90	90
Measuring range	Q <sub>3</sub> /Q <sub>1</sub>	R	80	80	80	80
Overall length	L	mm	165	190	130	190
Maximum register indication		m <sup>3</sup>	99.999	99.999	99.999	99.999
Verification scale interval	I		0,05	0,05	0,05	0,05
Width	B	mm	95	95	95	95
Total height	H	mm	112	112	129	112
Height to pipe axis	h	mm	34	34	34	34
Connection thread of meter	-	-	G3/4B	G3/4B	G3/4B	G3/4B
Nominal size	DN	mm	15	20	20	20
Piping dimensions	-	-	G1/2B	G3/4B	G3/4B	G3/4B
Weight	-	kg	1,350	1,550	1,300	1,550
Installation position			H	H	H	H



### Dimensions

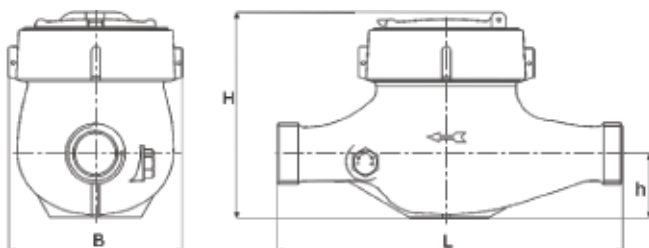

### Error Curve

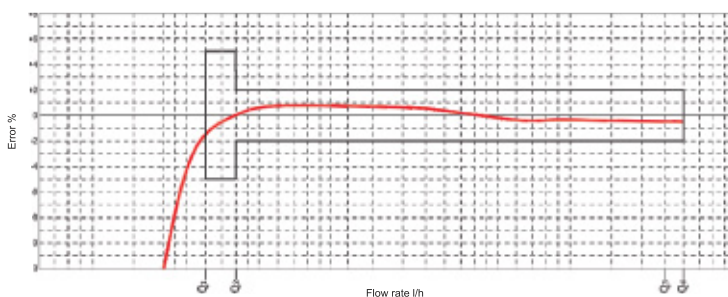

### Pressure Loss

