

- ▣ Multi-jet dry type
- ▣ Display on 5 drums m³ and 4 pointers for litres
- ▣ Magnetic protection
- ▣ Measuring range up to R160
- ▣ Optional pulse, M-bus, Radio frequency output
- ▣ Hermetically sealed register (IP68)
- ▣ GG25 Cast iron body
- ▣ Powder coating ensures maximum corrosion protection
- ▣ Water temperature up to 50°C




Technical Specification


Nominal diameter	DN	mm	50	50
Nominal flow rate	Q _s	m ³ /h	25	25
Maximum flow rate	Q ₄	m ³ /h	31,25	31,25
Minimum flow rate	Q ₁	l/h	312,5/250/156	312,5/250/156
Transitional flow rate	Q ₂	l/h	500/400/250	500/400/250
Maximum working pressure	P _{max}	bar	16	16
Pressure loss (max.Q3)	ΔP	bar	0,63	0,63
Maximum working temperature	T _{max}	°C	50	50
Measuring range	Q ₃ /Q ₁	R	80/100/160	80/100/160
Overall length	L	mm	300	350
Maximum register indication		m ³	99.999	99.999
Verification scale interval		l	0,05	0,05
Width	B	mm	160	160
Height	H	mm	210	210
Height to pipe axis	h	mm	75	75
Pipping dimensions	-	-	G2 1/2B	PN16/50
Weight	-	kg	13	17,750
Installation position			H	H



Dimensions

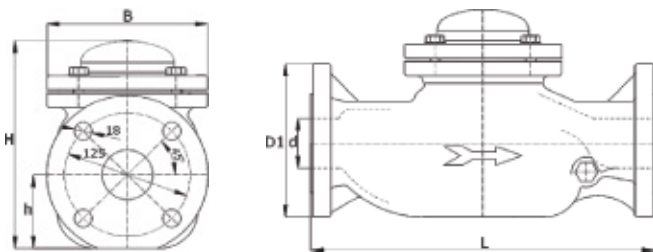

Error Curve

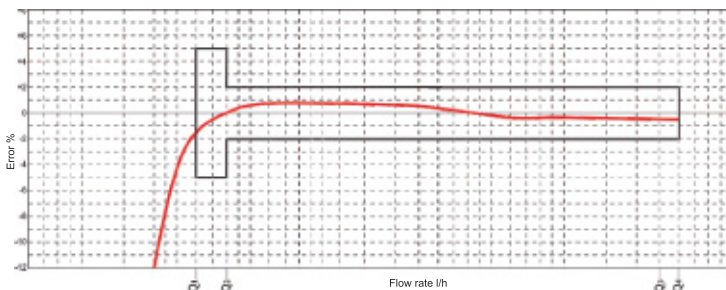

Pressure Loss

